


## TYPE KPA

### SCRULUG™

For Copper Cable

High copper alloy tin-plated terminal for joining a wide range of cable to equipment pads or terminal blocks. Especially good in light industrial applications. The tongue and body are a one-piece design. The pressure bar equalizes pressure over the conductor and prevents the screw from cutting into the cable.

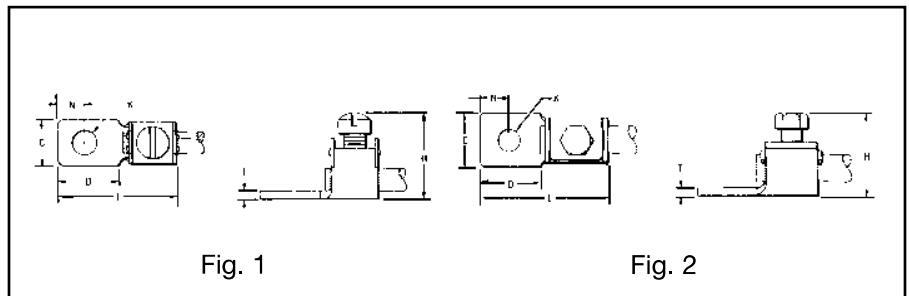

Catalog Number	Wire Range	Fig. No.	C	D	H	K	Stud Hole Size	L	N	T	Recommended Tightening Torque in-lb
KPA8C	14 Sol. - 8 Str.	1	.38	.47	.72	.21	.10	.95	.22	.06	12
<b>KPA4C</b>	<b>14 Sol. - 4 Str.</b>	<b>1</b>	<b>.50</b>	<b>.59</b>	<b>.94</b>	<b>.27</b>	<b>1/4</b>	<b>1.20</b>	<b>.30</b>	<b>.06</b>	<b>45</b>
KPA25	4 Str. - 1/0 Str.	2	.75	.81	1.25	.33	5/16	1.70	.41	.10	180
KPA28	1/0 Str. - 4/0 Str.	2	.97	1.12	1.66	.40	3/8	2.29	.53	.13	250
KPA34	4/0 Str. - 500 kcmil	2	1.38	1.38	2.44	.54	1/2	3.14	.75	.20	375

NOTE: For unplated version add "UNPL" suffix.

Blue highlighted items are industry standard and most frequently ordered.